

■ **ICT-6D** ■

**Digital IC Tester  
User's Manual**

Leap Electronic

6F-4, No.4, Ln.609, Sec.5, Chongxin Rd., Sanchong Dist.,  
New Taipei City 24159, Taiwan, ROC

TEL: +886-2-2999-1860, FAX: +886-2-2999-9873

## Warranty

**NOTE:** THE WARRANTY BELOW REPLACES ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS, OR ADEQUACY FOR ANY PARTICULAR PURPOSE OR USE. Leap Electronic SHALL NOT BE LIABLE FOR ANY SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, WHETHER IN CONTRACT OR OTHERWISE. THE CUSTOMER IS RESPONSIBLE FOR THE TRANSPORTATION AND INSURANCE CHARGES FOR THE RETURN OF PRODUCTS TO THE SERVICE FACILITY. Leap Electronic WILL RETURN ALL PRODUCTS UNDER WARRANTY WITH TRANSPORT PREPAID.

The Leap Electronic is warranted for normal use and operation, within specifications, for a period of three years from shipment. Leap Electronic will either repair or, at our option, replace any product returned to one of our authorized service centers within this period. However, in order to do this we must first examine the product and find that it is defective due to workmanship or materials and not due to misuse, neglect, accident, or abnormal conditions or operation.

Leap Electronic shall not be responsible for any defect, damage, or failure caused by any of the following: a) attempted repairs or installations by personnel other than Leap Electronic representatives or b) improper connection to incompatible equipment, or c) for any damage or malfunction caused by the use of non-Leap Electronic supplies. Furthermore, Leap Electronic shall not be obligated to service a product that has been modified or integrated where the modification or integration increases the task duration or difficulty of servicing the Leap Electronic. Spare and replacement parts, and repairs, all have a 90-day warranty.

The Leap Electronic's firmware has been thoroughly tested and is presumed to be functional. Nevertheless, it is supplied without warranty of any kind covering detailed performance. Products not made by Leap Electronic are covered solely by the warranty of the original equipment manufacturer.

**Internet:** [www.leap.com.tw](http://www.leap.com.tw) © 2014 by Leap Electronic Corporation. All rights reserved.

Leap Electronic, ActiveDSO, JitterTrack, WavePro, WaveMaster, WaveSurfer, WaveLink, WaveExpert, Waverunner, and WaveAce are registered trademarks of Leap Electronic Corporation. Other product or brand names are trademarks or requested trademarks of their respective holders. Information in this publication supersedes all earlier versions. Specifications are subject to change without notice.

Manufactured under an ISO 9000  
Registered Quality Management  
System. Visit [www.leap.com.tw](http://www.leap.com.tw) to view  
the certificate.



This electronic product is subject to disposal and recycling regulations that vary by country and region. Many countries prohibit the disposal of waste electronic equipment in standard waste receptacles. For more information about proper disposal and recycling of your Leap Electronic product, please visit [www.leap.com.tw](http://www.leap.com.tw)

# Content

---

|                                 |    |
|---------------------------------|----|
| Safety Requirements .....       | 1  |
| Introduction / FEATURES .....   | 5  |
| SPECIFICATIONS .....            | 6  |
| CONTROLS & INDICATORS .....     | 7  |
| Instruction of Keys .....       | 8  |
| Instruction of Operating        |    |
| 1. Operation Instructions ..... | 9  |
| 2. Testing Procedures .....     | 10 |
| 3. Auto Loop Test .....         | 11 |
| 4. Auto Search .....            | 12 |
| TROUBLE SHOOTING .....          | 13 |
| MESSAGE DESCRIPTION .....       | 14 |
| PARTS LIST .....                | 15 |
| TOTAL ASSEMBLY .....            | 16 |
| Key Code Description .....      | 17 |

---

## Safety Requirements

This section contains information and warnings that must be observed to keep the instrument operating in a correct and safe condition. You are required to follow generally accepted safety procedures in addition to the safety precautions specified in this section.

### Safety Symbols

Where the following symbols appear on the instrument's front or rear panels, or in this manual, they alert you to important safety considerations.




This symbol is used where caution is required. Refer to the accompanying information or documents in order to protect against personal injury or damage to the instrument.

---



This symbol warns of a potential risk of shock hazard.

---



This symbol is used to denote the measurement ground connection.

---




This symbol is used to denote a safety ground connection.

---



On (Supply). This is the AC mains connect/disconnect switch at the back of the instrument.

---



Off (Supply). This is the AC mains connect/disconnect switch at the back of the instrument.

---



This symbol is used to denote Alternating Current.

---

### CAUTION

The **CAUTION** sign indicates a potential hazard. It calls attention to a procedure, practice or condition which, if not followed, could possibly cause damage to equipment. If a CAUTION is indicated, do not proceed until its conditions are fully understood and met.

---

### WARNING

The **WARNING** sign indicates a potential hazard. It calls attention to a procedure, practice or condition which, if not followed, could possibly cause bodily injury or death. If a WARNING is indicated, do not proceed until its conditions are fully understood and met.

---

### CAT II

Installation (Overvoltage) Category rating per EN 61010-1 safety standard and is applicable for the IC tester front panel measuring terminals. CAT II rated terminals must only be connected to source circuits in which measures are taken to limit transient voltages to an appropriately low level.

## Operating Environment

The instrument is intended for indoor use and should be operated in a clean, dry environment. Before using this product, ensure that its operating environment is maintained within these parameters:

**Temperature:** 10 to 40 °C.

**Humidity:** Maximum relative humidity 80 % for temperatures up to 31 °C decreasing linearly to 50 % relative humidity at 40 °C.

**Altitude:** Up to 2,000m at or below 25 °C.

**Note:** Direct sunlight, radiators, and other heat sources should be taken into account when assessing the ambient temperature.



### WARNING

The IC tester must not be operated in explosive, dusty, or wet atmospheres.

Ensure adequate ventilation by leaving the required 5 cm (2 inch) minimum gap around the sides of the instrument.

---



### CAUTION

Do not block the ventilation holes located on both sides of the IC tester.

---



**CAUTION**

Do not allow any foreign matter to enter the IC tester through the ventilation holes, etc.

## AC Power Source

100 to 240 VAC (+/-10%) at 50/60; Installation Category:  
300V CAT II

No manual voltage selection is required because the instrument automatically adapts to line voltage.

## Power and Ground Connections

The instrument is provided with a 10A/250V 18AWG rated grounded cord set containing a molded three-terminal polarized plug and a standard IEC320 (Type C13) connector for making line voltage and safety ground connections. The AC inlet ground terminal is connected directly to the frame of the instrument. For adequate protection against electrical shock hazard, the power cord plug must be inserted into a mating AC outlet containing a safety ground contact.



**WARNING - Electrical Shock Hazard**

Only use the power cord provided with your instrument.

Any interruption of the protective conductor inside or outside of the IC tester, or disconnection of the safety ground terminal creates a hazardous situation. Intentional interruption is prohibited.

In Standby mode, the IC TESTER is still connected to the AC supply. The instrument can only be placed in a complete Power Off state by physically disconnecting the power cord from the AC supply or by flipping the main power switch on the back of the IC TESTER to the off (Zero) position.

---



**CAUTION**

The enclosure of back chassis terminal is connected to the instrument's chassis and therefore to the safety ground.

## Fuse Replacement

Set the instrument Standby (power) switch to, flip the mains power switch to the OFF (0) position, and disconnect the power cord before inspecting or replacing the fuse. Open the black fuse holder (located at the rear of the instrument below the main power switch) using a small, flat-bladed screwdriver. Remove the old fuse, replace it with a new 5 X 20 mm T rated 2 A/250 V fuse, and reinstall the fuse holder.



### **WARNING**

For continued fire protection at all line voltages, replace fuse with the specified type and rating only. Always disconnect the power cord before replacing the fuse.

## Cleaning

Clean only the exterior of the instrument, using a damp, soft cloth. Do not use chemicals or abrasive elements. Under no circumstances allow moisture to penetrate the instrument.

Avoid electrical shock hazard by unplugging the power cord from the AC outlet before cleaning.



### **WARNING - Electrical Shock Hazard**

- No operator serviceable parts inside.
- Do not remove covers.
- Refer servicing to qualified personnel.

## Abnormal Conditions

Operate the instrument only as intended by the manufacturer.

If you suspect the IC TESTER'S protection has been impaired, disconnect the power cord and secure the instrument against any unintended operation.

The IC TESTER'S protection is likely to be impaired if, for example, the instrument shows visible damage or has been subjected to severe transport stresses.

Proper use of the instrument depends on careful reading of all instructions and labels.



### **WARNING**

Any use of the IC tester in a manner not specified by the manufacturer may impair the instrument's safety protection.

## Introduction

---

LEAP ELECTRONIC, accumulated over 20 years experiences in electronic products' research and development, is a pioneering manufacturer in IC testers industry. The ICT-6D, desktop design, is a newly launched and best quality possible and multi-functions equipped product. It the replacement for ICT-6C. It provide 5V 、3.3V 、3.0V 、2.5V 4 kinds of voltage.

User's friendly sets up by replacing another IC ; the ICT-6D continues to undertake the task. The hard ware design of "black-light" function extends user's convenience for testing ICs in an inadequate light environment. The Buzzer key built in various tones can easily identify the testing result. The unique capability in identifying over 1800 CMOS/TTL digital ICs (up to 24 pins) surpasses the other major digital IC testers.

The ICT-6D feature such as built in "auto search & test" speeds to identify and test IC. In addition, the "loop" design for continuously testing function is intelligently applied to detect defective ICs and their stability. All these strengths provide significantly conveniences for digital IC testers.

All the ICT-6D accumulated incalculable benefits are to be discovered as users utilize the value-added, multi-functions equipped tester. This is a best choice for the factories, R&D sections, maintenance departments, laboratories as well as academics because it really creates future with your business.

## FEATURES

---


1. Reliable desktop design.
2. User's friendly set up and operates.
3. 16 X 1 character LCD display.
4. Built in 6 functions and 10 numerical keys.
5. Identifier over 1800 CMOS/TTL digital ICs (up to 24 pins).
6. High test speed at an average 0.6 second for one IC test.
7. The following IC series can be tested under 5V, 3.3V, 3.0V, 2.5V.
  - (1) 54/74 TTL series.
  - (2) 40/45 CMOS series.
  - (3) Driver series.
  - (4) Other compatible ICs with the above mentioned devices.
8. "AUTO" function key supports "auto search and test" function. User only to put the IC into the socket, no need to press any key, no need to process any other movements, the "auto search and test" will continue processing.
9. "LOOP" function key supports "continue examining", able to make sure reliability of the IC.
10. Various "BUZZER" sounds to presents the test results "FAIL", or "PASS".



## SPECIFICATIONS









|                       |   |
|-----------------------|---|
| DISPLAY               | 16x1 character dot matrix LCD display                   |
| TEST SOCKET           | One position for 28 Pin IC socket                       |
| OPERATIONAL KEY       | ( 1 ) TYPE, BUZZER, VOLTAGE, LOOP, AUTO, GO, BACK SPACE |
|                       | ( 2 ) 10 numerical keys ( 0 – 9 )                       |
| TEST VOLTAGE          | 5V , 3.3V, 3.0V, 2.5V VDC                               |
| ALARM                 | Various tones for the test result                       |
| POWER SUPPLY          | 110/220VAC, 50/60 Hz (Auto range)                       |
| OPERATING TEMPERATURE | 10°C to 40 °C   |
| STORAGE TEMPERATURE   | 0°C to 50 °C  |
| MEASUREMENT           | 13”(W) x 11.8”(D) x 4.3”(H)                             |
| WEIGHT                | 3.3 LB ( 1.5Kgs )                                       |
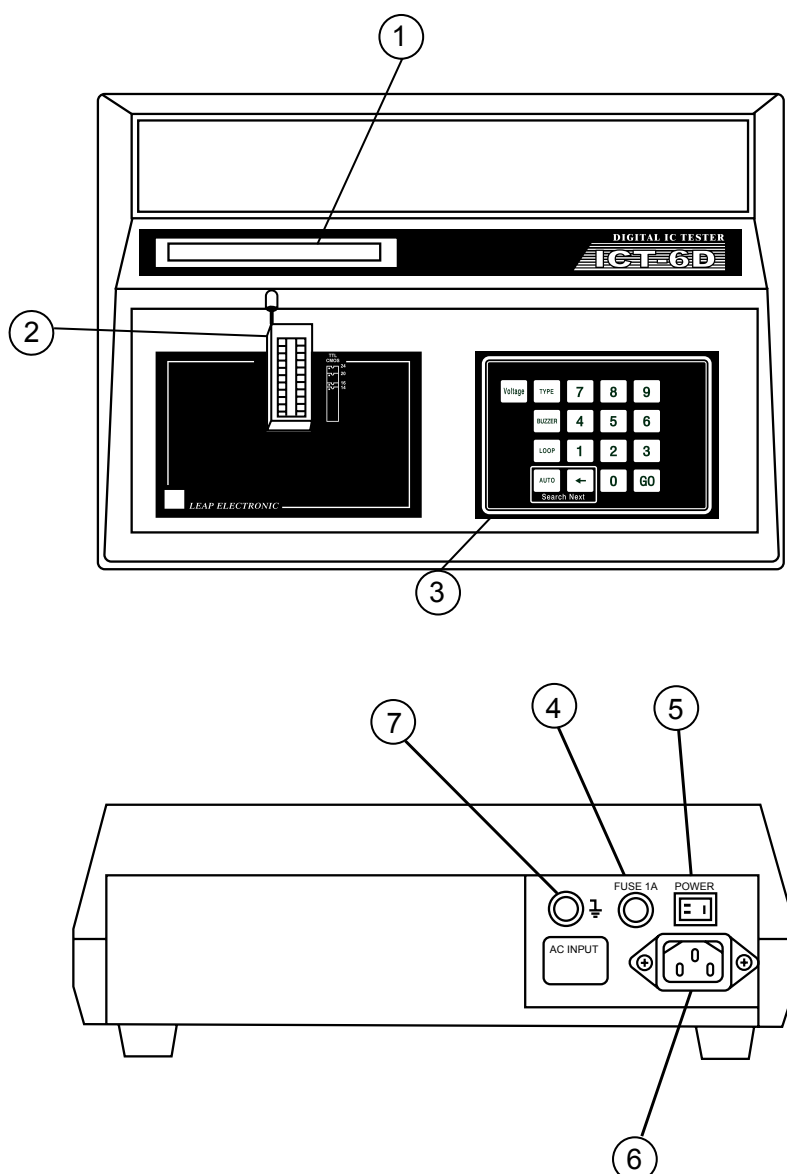
## CONTROLS & INDICATORS



- (1)Liquid Crystal Display ..... 16x1 character 9x7 dot matrix LCD display.
- (2)28Pin Test IC Socket
- (3)Keyboard
- (4)Fuse ..... 1A, protects tester from damage.
- (5)Power Switch ..... Power On or Off.
- (6)AC Receptacle ..... Plug power cord.
- (7)GND ..... Ground

## Instruction of Keys

| Key   | Instruction   |
|---|---|
|    | Numerical Keys<br>Input IC numbers for test.  |
|    | Execution key<br>1.Executes testing work as inputting a device number.<br>2.Repeats test.   |
|    | IC series selection key<br>Switches selection "TTL74", "CMOS40", "CMOS45", "DRIVER".  |
|   | Voltage selection function key.<br>For switching different voltage.   |
|  | Auto search and test key.<br>If change into new IC, the "auto search & test" will auto detect the IC, and continue to test.   |
|  | Loop test key<br>1.Test IC stability.<br>2.Stops and shows errors as a defective IC is found.<br>3.Press any key to stop running.<br>4.If take the IC away, the LCD will show "EMPTY. Then, if put any IC into socket, the "LOOP" function will continue.<br>5.Use numerical key of 0 to 9, key in the IC number, and press "LOOP" to test. |
|  | Back space Key<br>1.Erases wrong number in the left side of ←<br>2.if on the AUTO mode, press this key for searching next same function IC no.  |
|  | BUZZERING switching key<br>Switches BUZZER on/off   |

## Operation Instructions

STEP1. Plug in AC power cord, then switch power on. The black light of LCD is on and presents software version. It starts self-test.

SYSTEM CHECK...

If OK, the LCD will show the below.

SYSTEM READY !!

STEP2. Auto search the IC number and test if an IC is on the socket.

TTL 74245 FOUND

STEP3. Use **TYPE** key to switch "TTL 74", "CMOS40", "CMOS45", "DRIVER" series.

TTL 74

CMOS40

CMOS45

DRIVER

Step 4. Use **Voltage** key to switch 5V, 3.3V, 3.0V, 2.5V voltage.

VCC VOLTAGE : 5.0V

VCC VOLTAGE : 3.3V

VCC VOLTAGE : 3.0V

VCC VOLTAGE : 2.5V

Note: voltage switch is only for the same IC part. If change IC family or part no, the voltage will automatic come back to the default 5.0V.


## Testing Procedures

|  |  |
|--|--|
| <p>STEP1. Put IC on the socket and IC's bottom line up with socket. Pin 1 side faces up.</p> <div style="text-align: center;"> </div>  | <p>STEP 2. Use <b>TYPE</b> key to switch "TTL 74", "CMOS40", "CMOS45", "DRIVER" families.</p> <div style="margin-top: 10px;"> <div style="border: 1px solid black; padding: 2px; margin-bottom: 2px;">TTL 74</div> <div style="border: 1px solid black; padding: 2px; margin-bottom: 2px;">CMOS40</div> <div style="border: 1px solid black; padding: 2px; margin-bottom: 2px;">CMOS45</div> <div style="border: 1px solid black; padding: 2px;">DRIVER</div> </div> |
| <p>Step 3. key in the IC no, eg, TTL 74LS244, key in orderly 2, 4, 4.</p> <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"> <p>LCD display</p> <div style="border: 1px solid black; padding: 2px; display: inline-block;">TTL 74244</div> </div> <div style="text-align: center;"> <p>Input key</p> <div style="display: flex; gap: 5px;"> <div style="border: 1px solid black; padding: 2px 5px;">2</div> <div style="border: 1px solid black; padding: 2px 5px;">4</div> <div style="border: 1px solid black; padding: 2px 5px;">4</div> </div> </div> </div>         |  |
| <p>STEP4. Use <b>Voltage</b> key to switch 5V, 3.3V, 3.0V, 2.5V.</p> <div style="margin-top: 10px;"> <div style="border: 1px solid black; padding: 2px; margin-bottom: 2px;">VCC VOLTAGE : 5.0V</div> <div style="border: 1px solid black; padding: 2px; margin-bottom: 2px;">VCC VOLTAGE : 3.3V</div> <div style="border: 1px solid black; padding: 2px; margin-bottom: 2px;">VCC VOLTAGE : 3.0V</div> <div style="border: 1px solid black; padding: 2px;">VCC VOLTAGE : 2.5V</div> </div>  |  |
| <p>STEP 5. Press <b>GO</b> key, the system will star testing IC, the result is as below.</p> <div style="display: flex; justify-content: space-around; align-items: center; margin-top: 10px;"> <div style="text-align: center;"> <p>Test OK, the LCD show</p> <div style="border: 1px solid black; padding: 2px; display: inline-block;">TTL 74244 PASS</div> <p>Test not OK, the LCD show</p> <div style="border: 1px solid black; padding: 2px; display: inline-block;">TTL 74244 FAIL</div> </div> <div style="text-align: center;"> <p>Press key</p> <div style="border: 1px solid black; padding: 2px 5px;">GO</div> </div> </div> |  |
| <p>STEP 6. Change the next IC, press GO for repeat the testing.</p>  |  |
| <p>STEP 7. If would like to test anther part number , key in the part number.</p>  |  |
| <p>Note: Some of ICs, the function is same but part number is different. The test result isl pass.</p>   |  |


## Auto Loop Test

1. When an IC is tested, the test results appear unstable such as sometimes good and sometimes not. The auto loop test is designed to detect this kind of problem.
2. When a big quantity of same number IC need to be tested, the auto loop test is speeding the process.

STEP1. Put IC on the socket and IC's bottom line up with socket. Pin 1 side faces up.

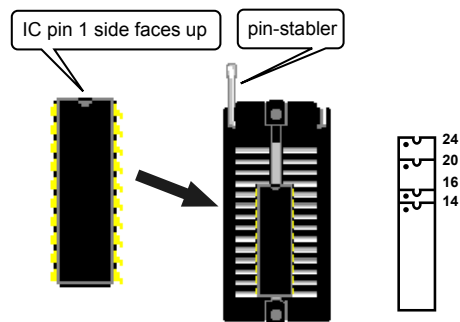


STEP2. Use **TYPE** to switch "TTL 74", "CMOS40", "CMOS45", "DRIVER" families.



STEP3. Key in the IC part no. eg, TTL 74LS244, press 2, 4, 4 orderly.



STEP4. Use **Voltage** to switch 5V, 3.3V, 3.0V, 2.5V voltage.



STEP5. Press **LOOP**. The system will star testing IC and show the numbers of times.



Error found was displayed on the LCD,  
"Error in: nnnnn" nnnnn = the number of the error times.

STEP6. If take the IC away from the socket, the system will back to the waiting IC put in situation.

STEP7. Put IC into the socket, tight down the pin-stabler. The system will star the "AUTO LOOP TEST"

STEP8. Press any key to stop the "AUTO LOOP TEST"

Note: The biggest number for counter is 65535. If over this number, the counter will star from 0.


## Auto Search

1. This test aims to search the unknown IC number.
2. When a big quantity of different number IC need to be tested, the auto loop test is speeding the process.

STEP1. Press **AUTO** . The LCD will show “- AUTO SEARCH -”

— AUTO SEARCH —

STEP2. Put IC into the socket and tight down the pin-stabler, The system will begin to process. If the test is correct, the LCD will show “PASS”. If the tests is incorrect, the LCD will show “FAIL”

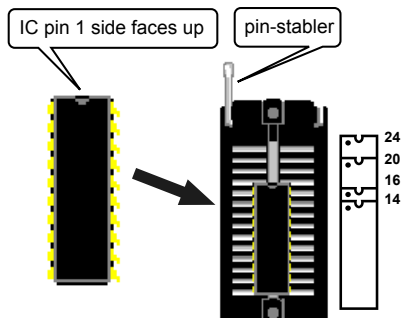

If the test is correct, the LCD will show “PASS”

TTL 74244 PASS

If the tests is incorrect, the LCD will show “FAIL”

TTL 74244 FAIL

STEP3. Take the IC away the socket. The system will back to the waiting IC situation. Repeat the above steps, the auto search function will continue.

STEP4. If the system search for new IC number, not the number which you press in, but the compatible IC. In this situation, no need to take the IC away, just press **←** key. It will switch to the next compatible IC. Repeat **←** key to the part number which you test.

STEP5. Press any key but not **←** key to quit this function. The LCD will show “CANCEL AUTO”. Then, come back to the original mode.

— CANCEL AUTO —

Note: IC number search result is presented from a small number to a bigger one, eg, 7404 is found before 7414.

## TROUBLE SHOOTING

| SITUATIONS   | REASONS   | HOW  |
|--|---|--|
| LCD's dark backlight<br>No message on the LCD<br>BUZZER no sound<br>No response from key board                         | Power off<br>Loose AC power cord<br>Burned fuse<br>-----<br>Loose LCD connector<br>Power supply damaged | Reset Power<br>Tighten AC power cord<br>Replace fuse<br>-----<br>Tighten LCD connector & plug<br>Contact regional distributor for assistance |
| BUZZER no sound.<br>LCD's back light is on.<br>LCD message appears<br>Response by any key on the key board             | BUZZER off<br>BUZZER damaged<br>Components Q1,R3 damaged  | Press BUZZER to switch<br>Replace SP1<br>Replace Q1, R3  |
| LCD appears irregular<br>LCD back light is dark.<br>Buzzer is no problem.  | Loose LCD flat cable<br>Damaged LCD's unit  | Tighten LCD's flat cable<br>Replace LCD's unit   |
| IC test unstable   | Bad connection between IC and socket<br>SOCKET unclear or damaged<br>Defective IC                       | Re-put IC, and pull down pin-stabler<br>Replace a SOCKET<br>Replace an IC  |
|  | Unstable internal circuit   | Connect local distributor for assistance   |
| Some keys no response  | Key board damaged   | Replace a keyboard   |
| LCD's black light is on.<br>LCD shows unstable<br>No buzzer sound.<br>No response by pressing any key on the key board | Loose CPU<br>Loose Internal Connector<br>Internal Circuit unstable                                      | Tighten internal connector & plug<br>Check if Y1 frequency is 12MHz<br>Connect local distributor for assistance                              |




## MESSAGE DESCRIPTION

|                      |                                       |
|----------------------|---------------------------------------|
| 1.< Version x.xx >   | System version                        |
| 2.SYSTEM CHECK...    | Power on and self-test                |
| 3.SYSTEM READY !!    | Pass self-test                        |
| 4.POWER ON SEARCH    | Power on and search IC number         |
| 5.TTL 74xxxx         | TTL 54/74xxx family                   |
| 6.CMOS40xxx          | CMOS 40XX family                      |
| 7.CMOS45xxx          | CMOS 45XX family                      |
| 8.Driver             | DRIVER family                         |
| 9.TTL 74xxx PASS     | Test pass                             |
| 10.TTL 74xxx FAIL    | Test fail                             |
| 11.TTL 74xxx nnnnn   | Counter for the total test number     |
| 12.Error in: nnnnn   | Counter for the error number          |
| 13.DEVICE ON SEARCH  | Searching IC number                   |
| 14.-PART NOT FOUND - | IC number not found                   |
| 15.TTL 74xxx FIND    | IC number find                        |
| 16.- AUTO SEARCH -   | Enter AUTO SEARCH mode                |
| 17.TTL 74xxx EMPTY   | Waiting for IC be put into the socket |
| 18.- CANCEL AUTO -   | Quit from AUTO search and test mode   |
| 19.- CANCEL LOOP -   | Quit from AUTO LOOP mode              |
| 20.-- BEEP ON --     | Sound on                              |
| 21.-- BEEP OFF --    | Sound off                             |

| PARTS LIST |          |   |  |
|------------|----------|---|--|
| Item       | Quantity | Reference   | Part                                   |
| 1          | 2        | C21,C45   | 18P                                    |
| 2          | 4        | C25,C26,C29,C30   | 0.1uF 50V                              |
| 3          | 24       | C2,C4,C6,C7,C8,C9~C11,C13~C18,C20,C23,C27,C31,C37,C41,C42,C44,C46,C49 | 0.1uF/50V                              |
| 4          | 6        | TCP7~TCP11,   | 4.7uF/16V                              |
| 5          | 6        | TCP1,TCP4,TCP5,TCP6,TCP12,TCP13,                                      | 10uF/16V                               |
| 6          | 1        | C47   | 100uF/25V                              |
| 7          | 2        | D1,D2   | 1N4148                                 |
| 8          | 1        | R1  | 470 5% 1/4W                            |
| 9          | 1        | R2  | 3.3K                                   |
| 10         | 9        | R3,R24,R37,R38,R39,R40,R44,R18,R23                                    | 1K                                     |
| 11         | 2        | R5,R6   | 39R                                    |
| 12         | 10       | R7,R17,R27,R28,R29,R30,R31,R32,R33,R34                                | 10K                                    |
| 13         | 1        | R8  | 6.8K                                   |
| 14         | 2        | R9,R10  | 1R                                     |
| 15         | 3        | R12,R14,R15   | 10R                                    |
| 16         | 2        | R35,R36   | 470R                                   |
| 17         | 1        | R41   | 47K                                    |
| 18         | 1        | R42   | 68K                                    |
| 19         | 1        | R49   | 8R                                     |
| 20         | 1        | RN1   | 10K x 4 chip resistor array            |
| 21         | 3        | RN2,RN3,RN6   | 1K x 4 chip resistor array             |
| 22         | 6        | RN4,RN5,RN7~RN10  | 4.7K x 4 chip resistor array           |
| 23         | 1        | RN11  | 100K x 4 chip resistor array           |
| 24         | 2        | D1,D2   | 1N4148                                 |
| 25         | 2        | L1,L2   | ICB321611-300                          |
| 26         | 5        | Q1,Q10~Q13  | 2SD596                                 |
| 27         | 8        | Q4~Q9,Q14,Q15   | 2SB624                                 |
| 28         | 1        | SP1   | KSS-1206 LP-U4 BUZZER                  |
| 29         | 2        | U1,U11  | LM317                                  |
| 30         | 3        | U2,U4,U7  | 74LS06                                 |
| 31         | 1        | U10   | AIC1117-33                             |
| 32         | 1        | U12   | KA7805                                 |
| 33         | 1        | Y1  | 12.000MHz XTAL                         |
| 34         | 1        | Y2  | 32.768KHz XTAL                         |
| 35         | 1        | U1  | CPU UNIT                               |
| 36         | 17       | SW1 - SW17  | KEY(12x12mm)DTSK-22                    |
| 37         | 1        | TEXTTOOL1   | 28 Pin TEXTTOOL                        |
| 38         | 1        | J2  | 2Pin 180' POWER CONNECTOR              |
| 39         | 1        | J1  | 14 Pin 180' HEADER                     |
| 40         | 1        | LCD   | 16x1 LCD CM-1611S1LY                   |
| 41         | 1        | PCB   | T6D PCB                                |
| 42         | 1        | CASE  | T6D CASE                               |
| 43         | 1        | POWER   | S/W POWER SUPPLY 9V 0.9A<br>AC 90-230V |

## TOTAL ASSEMBLY

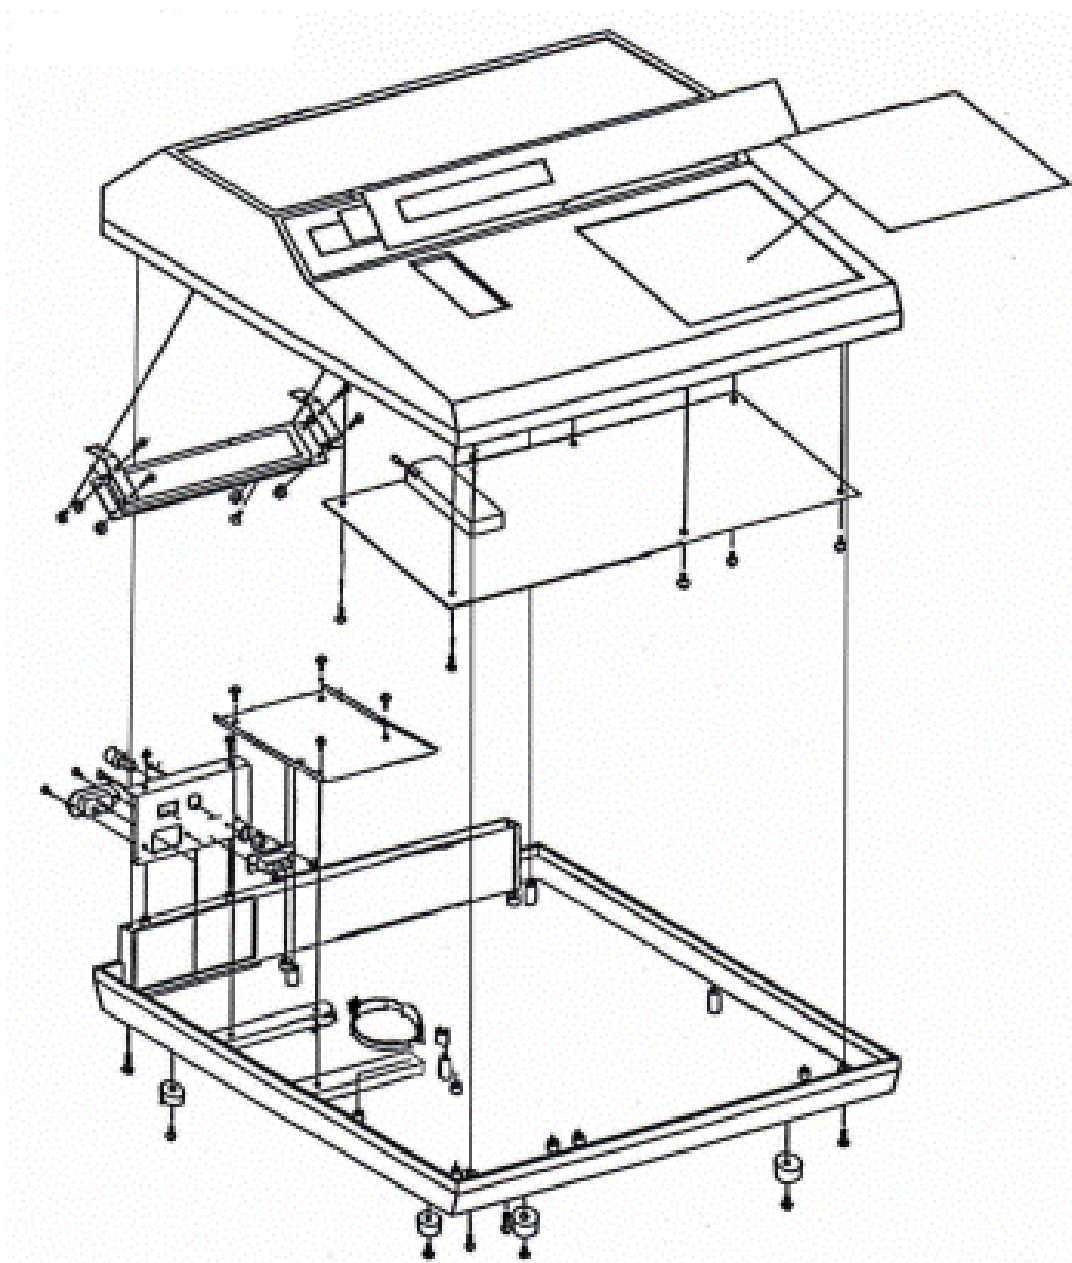

## Key Code Description

|  |
|--|
| Input device number without series key code. It runs by switching TYPE selection   |
| SAMPLE1. TTL74138<br>Press TYPE to switch to TTL 74. Then, key in 1, 3, 8.   |
| SAMPLE2. CMOS 4020<br>Press TYPE to switch to CMOS40. Then, key in 2, 0.   |
| SAMPLE3. CMOS 74HC4040<br>Press TYPE to switch to CMOS40. Then, key in 4, 0.   |
| SAMPLE4. DRIVER ULN2003<br>Press TYPE to switch to DRIVER. Then, key in 2, 0, 0, 3.  |
| Some ICs have different pin assignments despite that they have the same number. In this situation, various key codes information is supplemented for this group's IC. Please refer the appendixes. |

## KEY CODE TABLES

| SERIES<br>54/74<br>NO. | CIRCUIT DESCRIPTION |     |   |   |   |     |   |    |   |     |    |    |     |
|------------------------|---------------------|-----|---|---|---|-----|---|----|---|-----|----|----|-----|
|                        | LS                  | ALS | F | S | L | STD | H | HC | C | HCT | AS | AC | ACT |
| 00                     | X                   | X   | X | X | X | X   | X | X  | X | X   |    | X  | X   |
| 01                     | X                   | X   |   |   |   | X   |   |    |   |     |    |    |     |
| 02                     | X                   | X   | X | X | X |     | X | X  |   |     |    | X  | X   |
| 03                     | X                   | X   |   | X | X | X   |   | X  |   |     |    |    |     |
| 04                     | X                   | X   | X | X | X | X   | X | X  | X | X   |    | X  | X   |
| 05                     | X                   | X   |   | X |   | X   | X |    |   |     |    | X  | X   |
| 06                     | X                   |     |   |   |   | X   |   |    |   |     |    |    |     |
| 07                     | X                   |     |   |   |   | X   |   |    |   |     |    |    |     |
| 08                     | X                   | X   | X | X |   | X   |   | X  | X |     |    | X  | X   |
| 09                     | X                   | X   |   | X |   | X   |   |    |   |     |    |    |     |
| 10                     | X                   | X   | X | X | X | X   | X | X  | X |     |    | X  | X   |
| 11                     | X                   | X   | X | X |   |     | X | X  |   |     |    |    |     |
| 12                     | X                   | X   |   |   |   | X   |   |    |   |     |    |    |     |
| 13                     | X                   |     |   |   |   | X   |   |    |   |     |    |    |     |
| 14                     | X                   |     |   |   |   | X   |   | X  | X | X   |    |    |     |
| 15                     | X                   | X   |   | X |   |     | X |    |   |     |    |    |     |
| 16                     | X                   |     |   |   |   | X   |   |    |   |     |    |    |     |
| 17                     | X                   |     |   |   |   | X   |   |    |   |     |    |    |     |
| 18                     | X                   |     |   |   |   |     |   |    |   |     |    |    |     |
| 19                     | X                   |     |   |   |   |     |   |    |   |     |    |    |     |
| 20                     | X                   | X   | X | X | X | X   | X | X  | X |     |    | X  | X   |
| 21                     | X                   | X   |   |   |   | X   |   |    |   |     |    |    |     |
| 22                     | X                   | X   |   | X |   | X   | X |    |   |     |    |    |     |
| 23                     | X                   |     |   |   |   | X   |   |    |   |     |    |    |     |
| 24                     | X                   |     |   |   |   | X   |   |    |   |     |    |    |     |
| 25                     | X                   |     |   |   |   | X   |   |    |   |     |    |    |     |
| 26                     | X                   |     |   |   |   | X   |   |    |   |     |    |    |     |
| 27                     | X                   | X   |   |   |   | X   |   | X  |   |     |    |    |     |
| 28                     | X                   | X   |   |   |   | X   |   |    |   |     |    |    |     |
| 30                     | X                   | X   |   | X | X | X   | X | X  | X |     |    |    |     |
| 32                     | X                   | X   | X | X |   | X   |   | X  | X |     |    | X  | X   |
| 33                     | X                   | X   |   |   |   | X   |   |    |   |     |    |    |     |

**ICT-6D**

| SERIES<br>54/74<br>NO. | CIRCUIT DESCRIPTION |     |   |   |   |     |      |    |   |     |    |    |     |
|------------------------|---------------------|-----|---|---|---|-----|------|----|---|-----|----|----|-----|
|                        | LS                  | ALS | F | S | L | STD | H    | HC | C | HCT | AS | AC | ACT |
| 34                     | X                   | X   |   |   |   |     |      |    |   |     |    |    |     |
| 35                     | X                   | X   |   |   |   |     |      |    |   |     |    |    |     |
| 36                     |                     |     | X |   |   |     |      |    |   |     |    |    |     |
| 37                     | X                   | X   |   |   |   | X   |      |    |   |     |    |    |     |
| 38                     | X                   | X   |   | X |   | X   |      |    |   |     |    |    |     |
| 39                     | X                   |     |   |   |   |     |      |    |   |     |    |    |     |
| 40                     | X                   | X   |   | X |   | X   | X    |    |   |     |    |    |     |
| 41                     |                     |     |   |   |   |     |      |    |   |     |    |    |     |
| 42                     | X                   | X   |   |   | X | X   |      | X  | X |     |    |    |     |
| 43                     | X                   |     |   |   | X | X   |      |    |   |     |    |    |     |
| 44                     | X                   |     |   |   | X | X   |      |    |   |     |    |    |     |
| 45                     | X                   |     |   |   |   | X   |      |    |   |     |    |    |     |
| 46                     | X                   |     |   |   | X | X   |      |    |   |     |    |    |     |
| 47                     | X                   |     |   |   | X | X   |      |    |   |     |    |    |     |
| 48                     | X                   |     |   |   |   | X   |      |    | X |     |    |    |     |
| 49                     | X                   |     |   |   |   |     |      |    |   |     |    |    |     |
| 50                     | X                   |     |   |   |   | X   |      |    |   |     |    |    |     |
| 51                     | X                   |     |   |   | X |     |      |    |   |     |    |    |     |
| 53                     | X                   |     |   |   |   | X   |      |    |   |     |    |    |     |
| 54                     | X                   |     |   |   | X |     | 9054 |    |   |     |    |    |     |
| 55                     | X                   |     |   |   | X |     |      |    |   |     |    |    |     |
| 60                     |                     |     |   |   |   |     | X    |    |   |     |    |    |     |
| 63                     | X                   |     |   |   |   |     |      |    |   |     |    |    |     |
| 64                     |                     |     | X | X |   |     |      |    |   |     |    |    |     |
| 65                     |                     |     |   | X |   |     |      |    |   |     |    |    |     |
| 70                     |                     |     |   |   |   | X   |      |    |   |     |    |    |     |
| 72                     |                     |     |   |   | X | X   | X    |    |   |     |    |    |     |
| 73                     | X                   |     |   |   |   |     |      | X  | X |     |    |    |     |
| 74                     | X                   | X   | X | X | X | X   | X    | X  | X |     |    |    |     |
| 75                     | X                   |     |   |   | X | X   |      | X  |   |     |    |    |     |
| 77                     | X                   |     |   |   |   | X   |      |    |   |     |    |    |     |
| H78                    |                     |     |   |   |   |     | 9078 |    |   |     |    |    |     |

**ICT-6D**

| SERIES<br>54/74<br>NO. | CIRCUIT DESCRIPTION |     |   |   |   |     |   |    |   |     |    |    |     |
|------------------------|---------------------|-----|---|---|---|-----|---|----|---|-----|----|----|-----|
|                        | LS                  | ALS | F | S | L | STD | H | HC | C | HCT | AS | AC | ACT |
| 80                     |                     |     |   |   |   |     |   |    |   |     |    |    |     |
| 81                     |                     |     |   |   |   |     |   |    |   |     |    |    |     |
| 82                     |                     |     |   |   |   |     |   |    |   |     |    |    |     |
| 83                     | X                   |     |   |   |   | X   |   |    | X |     |    |    |     |
| 84                     |                     |     |   |   |   |     |   |    |   |     |    |    |     |
| 85                     | X                   |     |   | X |   | X   |   | X  | X |     |    |    |     |
| 86                     | X                   | X   | X | X |   | X   |   | X  | X |     |    | X  | X   |
| 87                     |                     |     |   |   |   |     | X |    |   |     |    |    |     |
| 89                     |                     |     |   |   |   |     |   |    |   |     |    |    |     |
| 90                     | X                   |     |   |   | X | X   |   |    | X |     |    |    |     |
| 91                     | X                   |     |   |   | X | X   |   |    |   |     |    |    |     |
| 92                     | X                   |     |   |   |   | X   |   |    |   |     |    |    |     |
| 93                     | X                   |     |   |   |   | X   |   |    | X |     |    |    |     |
| 94                     | X                   |     |   |   |   |     | X |    |   |     |    |    |     |
| 95                     | X                   |     |   |   |   | X   |   |    | X |     |    |    |     |
| 96                     | X                   |     |   |   | X | X   |   |    |   |     |    |    |     |
| 105                    |                     |     |   |   |   |     |   |    |   |     |    |    |     |
| 107                    | X                   |     |   |   |   |     |   | X  | X |     |    |    |     |
| 109                    | X                   | X   | X |   |   | X   |   | X  |   |     | X  | X  | X   |
| 110                    |                     |     |   |   |   |     |   |    |   |     |    |    |     |
| 111                    |                     |     |   |   |   |     |   |    |   |     |    |    |     |
| 112                    | X                   | X   | X | X |   |     |   | X  |   |     | X  | X  | X   |
| 113                    | X                   | X   | X | X |   |     |   | X  |   |     | X  |    |     |
| 114                    | X                   | X   | X | X |   |     |   |    |   |     | X  |    |     |
| 116                    |                     |     |   |   |   |     |   |    |   |     |    |    |     |
| 125                    | X                   |     |   |   |   | X   |   | X  |   |     |    |    |     |
| 126                    | X                   |     |   |   |   | X   |   | X  |   |     |    |    |     |
| 128                    |                     |     |   |   |   |     |   |    |   |     |    |    |     |
| 132                    | X                   |     |   | X |   | X   |   | X  |   |     |    |    |     |
| 134                    | X                   |     |   | X |   |     |   |    |   |     |    |    |     |
| 135                    |                     |     |   | X |   |     |   |    |   |     |    |    |     |
| 136                    | X                   |     |   |   |   | X   |   |    |   |     |    |    |     |
| 137                    | X                   | X   |   |   |   |     |   | X  |   | X   |    |    |     |
| 138                    | X                   | X   | X | X |   |     |   | X  |   | X   |    | X  | X   |

**ICT-6D**

| SERIES<br>54/74<br>NO. | CIRCUIT DESCRIPTION |     |   |   |   |     |   |    |   |     |    |    |     |
|------------------------|---------------------|-----|---|---|---|-----|---|----|---|-----|----|----|-----|
|                        | LS                  | ALS | F | S | L | STD | H | HC | C | HCT | AS | AC | ACT |
| 139                    | X                   | X   | X | X |   |     |   | X  |   | X   |    | X  | X   |
| 140                    | X                   |     |   | X |   |     |   |    |   |     |    |    |     |
| 141                    | X                   |     |   |   |   | X   |   |    |   |     |    |    |     |
| 142                    |                     |     |   |   |   |     |   |    |   |     |    |    |     |
| 143                    | X                   |     |   |   |   |     |   |    |   |     |    |    |     |
| 144                    |                     |     |   |   |   |     |   |    |   |     |    |    |     |
| 145                    | X                   |     |   |   |   | X   |   |    |   |     |    |    |     |
| 147                    | X                   |     |   |   |   | X   |   | X  |   |     |    |    |     |
| 148                    | X                   |     | X |   |   | X   |   |    |   |     |    |    |     |
| 150                    | X                   |     |   |   |   | X   |   |    |   |     |    |    |     |
| 151                    | X                   | X   | X | X |   | X   |   | X  | X |     |    | X  | X   |
| 152                    | X                   |     |   |   |   |     |   |    |   |     |    |    |     |
| 153                    | X                   | X   | X | X |   | X   |   | X  |   |     |    | X  | X   |
| 154                    | X                   |     |   |   |   | X   |   |    |   |     |    |    |     |
| 155                    | X                   |     |   |   |   | X   |   |    |   |     |    |    |     |
| 156                    | X                   |     |   |   |   | X   |   |    |   |     |    |    |     |
| 157                    | X                   | X   | X | X | X | X   |   | X  | X |     |    | X  | X   |
| 158                    | X                   | X   | X | X |   |     |   | X  |   |     |    | X  | X   |
| 159                    | X                   |     |   |   |   | X   |   |    |   |     |    |    |     |
| 160                    | X                   | X   | X |   |   | X   |   | X  | X |     | X  |    |     |
| 161                    | X                   | X   | X |   |   | X   |   | X  | X |     | X  | X  | X   |
| 162                    | X                   | X   | X | X |   | X   |   | X  | X |     | X  |    |     |
| 163                    | X                   | X   | X | X |   | X   |   | X  | X |     | X  | X  | X   |
| 164                    | X                   | X   | X |   | X | X   |   | X  | X | X   |    | X  | X   |
| 165                    | X                   | X   |   |   |   | X   |   | X  | X |     |    |    |     |
| 166                    | X                   | X   |   |   |   | X   |   |    |   |     |    |    |     |
| 168                    | X                   | X   | X | X |   |     |   |    |   |     | X  |    |     |
| 169                    | X                   | X   | X | X |   |     |   |    |   |     | X  |    |     |
| 170                    | X                   |     |   |   |   | X   |   |    |   |     |    |    |     |
| 173                    | X                   |     |   |   |   | X   |   | X  | X |     |    |    |     |
| 174                    | X                   | X   | X | X |   | X   |   | X  | X |     |    | X  | X   |
| 175                    | X                   | X   | X | X |   | X   |   | X  | X |     |    | X  | X   |
| 176                    | X                   |     |   |   |   | X   |   |    |   |     |    |    |     |
| 177                    | X                   |     |   |   |   | X   |   |    |   |     |    |    |     |



**ICT-6D**

| SERIES<br>54/74<br>NO. | CIRCUIT DESCRIPTION |     |   |   |   |     |   |    |   |     |    |    |     |
|------------------------|---------------------|-----|---|---|---|-----|---|----|---|-----|----|----|-----|
|                        | LS                  | ALS | F | S | L | STD | H | HC | C | HCT | AS | AC | ACT |
| 178                    | X                   |     |   |   |   | X   |   |    |   |     |    |    |     |
| 179                    | X                   |     |   |   |   | X   |   |    |   |     |    |    |     |
| 180                    | X                   |     |   |   |   | X   |   |    |   |     |    |    |     |
| 181                    | X                   |     |   |   |   | X   |   |    |   |     |    |    |     |
| 182                    | X                   |     | X |   |   | X   | X | X  |   |     |    |    |     |
| 183                    | X                   |     |   |   |   |     | X |    |   |     |    |    |     |
| 184                    | X                   |     |   |   |   | X   |   |    |   |     |    |    |     |
| 185                    | X                   |     |   |   |   | X   |   |    |   |     |    |    |     |
| 189                    | X                   |     |   | X |   |     |   |    |   |     |    |    |     |
| 190                    | X                   | X   | X |   |   | X   |   | X  |   |     |    |    |     |
| 191                    | X                   | X   | X |   |   | X   |   | X  |   |     |    | X  | X   |
| 192                    | X                   | X   | X |   | X | X   |   | X  | X |     |    |    |     |
| 193                    | X                   | X   |   |   |   |     |   |    |   |     |    | X  | X   |
| 194                    | X                   |     | X | X |   | X   |   | X  |   |     |    |    |     |
| 195                    | X                   |     |   | X |   | X   |   | X  | X |     |    |    |     |
| 196                    | X                   |     |   | X |   | X   |   |    |   |     |    |    |     |
| 197                    | X                   |     |   | X |   | X   |   |    |   |     |    |    |     |
| 198                    | X                   |     |   |   |   | X   |   |    |   |     |    |    |     |
| 199                    | X                   |     |   |   |   | X   |   |    |   |     |    |    |     |
| 230                    |                     |     |   |   |   |     |   |    |   |     | X  |    |     |
| 231                    | X                   |     |   |   |   |     |   |    |   |     | X  |    |     |
| 238                    |                     |     |   |   |   |     |   |    |   |     |    | X  | X   |
| 240                    | X                   | X   | X | X |   |     |   | X  |   | X   | X  | X  | X   |
| 241                    | X                   | X   | X | X |   |     |   | X  |   | X   | X  | X  | X   |
| 242                    | X                   | X   | X |   |   |     |   | X  |   | X   | X  |    |     |
| 243                    | X                   | X   | X |   |   |     |   | X  |   | X   | X  |    |     |
| 244                    | X                   | X   | X |   |   |     |   | X  |   | X   | X  | X  | X   |
| 245                    | X                   | X   | X |   |   |     |   | X  | X | X   | X  | X  | X   |
| 246                    |                     |     |   |   |   |     |   |    |   |     |    |    |     |
| 247                    | X                   |     |   |   |   | X   |   |    |   |     |    |    |     |
| 248                    | X                   |     |   |   |   | X   |   |    |   |     |    |    |     |
| 249                    | X                   |     |   |   |   | X   |   |    |   |     |    |    |     |
| 251                    | X                   | X   | X | X |   | X   |   | X  |   |     | X  | X  | X   |
| 253                    | X                   | X   | X |   |   |     |   | X  |   |     | X  | X  | X   |

**ICT-6D**

| SERIES<br>54/74<br>NO. | CIRCUIT DESCRIPTION |     |   |   |   |     |   |    |   |     |    |    |     |
|------------------------|---------------------|-----|---|---|---|-----|---|----|---|-----|----|----|-----|
|                        | LS                  | ALS | F | S | L | STD | H | HC | C | HCT | AS | AC | ACT |
| 257                    | X                   | X   | X | X |   |     |   | X  |   |     |    | X  | X   |
| 258                    | X                   | X   | X | X |   |     |   |    |   |     |    | X  | X   |
| 259                    | X                   | X   |   | X |   | X   |   | X  |   |     |    |    |     |
| 260                    | X                   |     | X |   |   |     |   |    |   |     |    |    |     |
| 265                    | X                   | X   | X |   |   | X   |   | X  |   | X   |    |    |     |
| 266                    | X                   |     |   | X |   |     |   |    | X |     |    |    |     |
| 273                    | X                   | X   |   |   |   | X   |   | X  |   |     |    | X  | X   |
| 274                    |                     |     |   | X |   |     |   |    |   |     |    |    |     |
| 276                    | X                   |     |   |   |   | X   |   |    | X |     |    |    |     |
| 279                    | X                   |     |   |   |   | X   |   | X  |   |     |    |    |     |
| 280                    | X                   |     |   | X | X |     |   |    | X |     |    | X  | X   |
| 283                    | X                   |     | X | X |   | X   |   | X  |   |     |    | X  | X   |
| 289                    |                     |     |   |   |   |     |   |    |   |     |    |    |     |
| 290                    |                     |     |   |   |   | X   |   |    |   |     |    |    |     |
| 293                    | X                   |     |   |   |   | X   |   |    |   |     |    |    |     |
| 295                    | X                   |     |   |   |   |     |   |    |   |     |    |    |     |
| 298                    | X                   |     |   |   |   | X   |   | X  |   |     |    |    |     |
| 299                    | X                   | X   | X | X |   |     |   | X  |   |     | X  | X  | X   |
| 322                    | X                   |     | X |   |   |     |   |    |   |     |    |    |     |
| 323                    | X                   | X   | X |   |   | X   |   | X  | X |     | X  | X  | X   |
| 347                    | X                   |     |   | X |   | X   |   | X  | X |     | X  |    |     |
| 348                    | X                   |     |   |   |   |     |   |    |   |     |    |    |     |
| 350                    | X                   |     | X |   |   |     |   |    |   |     |    |    |     |
| 351                    |                     |     |   |   |   |     |   |    |   |     |    |    |     |
| 352                    | X                   | X   | X |   | X | X   |   | X  | X |     |    |    |     |
| 353                    | X                   |     |   |   |   | X   |   |    |   |     |    |    |     |
| 363                    |                     |     |   |   |   |     |   |    |   |     |    |    |     |
| 364                    | X                   |     |   |   |   |     |   |    |   |     |    |    |     |
| 365                    | X                   | X   |   |   |   | X   |   | X  |   |     |    |    |     |
| 366                    | X                   | X   |   |   |   | X   |   | X  |   |     |    |    |     |
| 367                    | X                   | X   |   |   |   | X   |   | X  |   |     |    |    |     |
| 368                    | X                   | X   |   |   |   | X   |   | X  |   |     |    |    |     |
| 373                    | X                   |     |   |   |   | X   |   |    |   |     |    | X  | X   |
| 374                    | X                   | X   | X | X |   |     |   | X  | X | X   | X  |    |     |

**ICT-6D**

| SERIES<br>54/74<br>NO. | CIRCUIT DESCRIPTION |     |   |   |   |     |   |    |   |     |    |    |     |
|------------------------|---------------------|-----|---|---|---|-----|---|----|---|-----|----|----|-----|
|                        | LS                  | ALS | F | S | L | STD | H | HC | C | HCT | AS | AC | ACT |
| 375                    | X                   |     |   |   |   |     |   |    |   |     |    |    |     |
| 377                    | X                   |     |   |   |   |     |   |    |   |     |    |    |     |
| 378                    | X                   |     | X |   |   |     |   | X  |   |     |    | X  | X   |
| 379                    | X                   |     |   |   |   | X   |   |    |   |     |    |    |     |
| 382                    | X                   |     |   |   |   |     |   |    |   |     |    |    |     |
| 386                    | X                   |     |   |   |   |     |   |    |   |     |    |    |     |
| 390                    | X                   |     |   |   |   |     |   | X  |   | X   |    |    |     |
| 393                    | X                   |     |   |   |   | X   |   | X  |   |     |    |    |     |
| 395                    | X                   |     |   |   |   |     |   |    |   |     |    |    |     |
| 399                    | X                   |     | X |   |   |     |   |    |   |     |    |    |     |
| 412                    |                     |     |   | X |   |     |   |    |   |     |    |    |     |
| 425                    | X                   |     |   |   |   | X   |   |    |   |     |    |    |     |
| 426                    | X                   |     |   |   |   | X   |   |    |   |     |    |    |     |
| 445                    | X                   |     |   |   |   |     |   |    |   |     |    |    |     |
| 447                    | X                   |     |   |   |   |     |   |    |   |     |    |    |     |
| 465                    | X                   | X   |   |   |   |     |   |    |   |     |    |    |     |
| 466                    | X                   | X   |   |   |   |     |   |    |   |     |    |    |     |
| 467                    | X                   | X   |   |   |   |     |   |    |   |     |    |    |     |
| 468                    | X                   | X   |   |   |   |     |   |    |   |     |    |    |     |
| 490                    | X                   | X   | X |   |   | X   |   |    |   |     |    |    |     |
| 518                    | X                   | X   | X |   |   |     |   |    |   |     |    |    |     |
| 519                    | X                   | X   | X |   |   |     |   |    |   |     |    |    |     |
| 520                    | X                   | X   | X |   |   |     |   |    |   |     |    |    |     |
| 521                    | X                   | X   | X |   |   |     |   | X  |   |     |    | X  | X   |
| 522                    |                     |     |   |   |   |     |   |    |   |     |    |    |     |
| 533                    | X                   |     |   |   |   |     |   |    |   |     |    | X  | X   |
| 534                    | X                   |     |   |   |   |     |   |    |   |     |    | X  | X   |
| 539                    | X                   | X   | X |   |   |     |   |    |   |     |    |    |     |
| 540                    |                     |     |   |   |   |     |   |    |   |     |    | X  | X   |
| 541                    |                     |     |   |   |   |     |   |    |   |     |    | X  | X   |
| 563                    | X                   | X   | X |   |   |     |   | X  |   | X   |    | X  | X   |
| * 564                  | X                   | X   | X |   |   |     |   | X  |   | X   |    | X  | X   |
| 573                    | X                   | X   |   |   |   |     |   | X  | X |     |    |    |     |
| * 574                  | X                   | X   |   |   |   |     |   | X  | X |     |    | X  | X   |

**ICT-6D**

| SERIES<br>54/74<br>NO. | CIRCUIT DESCRIPTION |     |   |   |   |     |   |    |   |     |    |    |     |
|------------------------|---------------------|-----|---|---|---|-----|---|----|---|-----|----|----|-----|
|                        | LS                  | ALS | F | S | L | STD | H | HC | C | HCT | AS | AC | ACT |
| 576                    | X                   | X   |   |   |   |     |   |    |   |     | X  |    |     |
| 580                    | X                   | X   |   |   |   |     |   |    |   |     | X  |    |     |
| 597                    | X                   |     |   |   |   |     |   | X  |   | X   |    |    |     |
| 620                    | X                   | X   |   |   |   |     |   | X  |   | X   |    |    |     |
| 621                    | X                   | X   |   |   |   |     |   | X  |   | X   |    |    |     |
| 622                    | X                   | X   |   |   |   |     |   | X  |   | X   |    |    |     |
| 623                    | X                   | X   |   |   |   |     |   | X  |   | X   |    |    |     |
| 638                    | X                   | X   |   |   |   |     |   |    |   |     | X  |    |     |
| 639                    | X                   | X   |   |   |   |     |   |    |   |     | X  |    |     |
| 640                    | X                   | X   |   |   |   |     |   | X  |   | X   |    |    |     |
| 641                    | X                   | X   |   |   |   |     |   |    |   |     |    |    |     |
| 642                    | X                   | X   |   |   |   |     |   |    |   |     |    |    |     |
| 643                    | X                   | X   |   |   |   |     |   | X  |   | X   |    |    |     |
| 644                    | X                   | X   |   |   |   |     |   |    |   |     |    |    |     |
| 645                    | X                   | X   |   |   |   |     |   |    |   |     |    |    |     |
| 646                    | X                   |     |   |   |   |     |   |    |   |     |    | X  | X   |
| 647                    | X                   |     |   |   |   |     |   |    |   |     |    | X  | X   |
| 652                    | X                   |     |   |   |   |     |   | X  |   | X   | X  | X  |     |
| 654                    | X                   |     |   |   |   |     |   |    |   |     |    |    |     |
| 668                    | X                   |     |   |   |   |     |   |    |   |     |    |    |     |
| 669                    | X                   |     |   |   |   |     |   | X  |   |     |    |    |     |
| 670                    | X                   | X   |   |   |   |     |   | X  |   |     |    |    |     |
| 682                    | X                   |     |   |   |   |     |   | X  |   |     |    |    |     |
| 683                    | X                   |     |   |   |   |     |   |    |   |     |    |    |     |
| 684                    | X                   |     |   |   |   |     |   | X  |   |     |    |    |     |
| 685                    | X                   |     |   |   |   |     |   |    |   |     |    |    |     |
| 688                    | X                   | X   |   |   |   |     |   | X  |   | X   |    |    |     |
| 689                    | X                   | X   |   |   |   |     |   |    |   |     |    |    |     |
| 795                    |                     |     |   |   |   |     |   |    |   |     |    |    |     |
| 796                    | X                   | X   |   |   |   |     |   |    |   |     |    |    |     |
| 797                    |                     |     |   |   |   |     |   |    |   |     |    |    |     |
| 798                    | X                   | X   |   |   |   |     |   |    |   |     |    |    |     |
| 804                    |                     | X   |   | X |   |     |   |    |   | X   |    |    |     |
| 805                    |                     | X   |   | X |   |     |   |    |   | X   |    |    |     |

**ICT-6D**

| SERIES<br>54/74<br>NO. | CIRCUIT DESCRITPION |     |   |   |   |     |   |    |   |     |    |    |     |
|------------------------|---------------------|-----|---|---|---|-----|---|----|---|-----|----|----|-----|
|                        | LS                  | ALS | F | S | L | STD | H | HC | C | HCT | AS | AC | ACT |
| 808                    |                     | X   |   | X |   |     |   |    |   | X   |    |    |     |
| 810                    |                     | X   |   |   |   |     |   |    |   |     | X  |    | X   |
| 811                    |                     | X   |   |   |   |     |   |    |   |     | X  |    |     |
| 821                    |                     |     | X |   |   |     |   |    |   |     | X  |    |     |
| 827                    | X                   | X   | X |   |   |     |   |    |   |     |    |    |     |
| 832                    |                     | X   |   | X |   |     |   |    |   | X   |    |    |     |
| 841                    |                     | X   |   |   |   |     |   |    |   |     | X  |    |     |
| 874                    |                     | X   |   |   |   |     |   |    |   |     | X  |    |     |
| 1000                   | X                   | X   |   |   |   |     |   |    |   |     |    |    |     |
| 1002                   |                     | X   |   |   |   |     |   |    |   |     |    |    |     |
| 1003                   |                     | X   |   |   |   |     |   |    |   |     |    |    |     |
| 1004                   |                     | X   |   |   |   |     |   |    |   |     |    |    |     |
| 1005                   |                     | X   |   |   |   |     |   |    |   |     |    |    |     |
| 1008                   |                     | X   |   |   |   |     |   |    |   |     |    |    |     |
| 1010                   |                     | X   |   |   |   |     |   |    |   |     |    |    |     |
| 1011                   |                     | X   |   |   |   |     |   |    |   |     |    |    |     |
| 1020                   |                     | X   |   |   |   |     |   |    |   |     |    |    |     |
| 1034                   |                     | X   |   |   |   |     |   |    |   |     |    |    |     |
| 1035                   |                     | X   |   |   |   |     |   |    |   |     |    |    |     |
| 1036                   |                     | X   |   |   |   |     |   |    |   |     |    |    |     |
| 1244                   |                     |     |   |   |   |     |   |    |   |     |    |    |     |
| 1245                   |                     | X   |   |   |   |     |   |    |   |     |    |    |     |

| SERIES<br>40<br>NO. | CIRCUIT DESCRITPION |   |    |    |  |  |  |  |  |  |  |  |  |
|---------------------|---------------------|---|----|----|--|--|--|--|--|--|--|--|--|
|                     | A                   | B | HC | UB |  |  |  |  |  |  |  |  |  |
| 00                  | X                   | X |    | X  |  |  |  |  |  |  |  |  |  |
| 01                  | X                   | X |    |    |  |  |  |  |  |  |  |  |  |
| 02                  | X                   | X | X  | X  |  |  |  |  |  |  |  |  |  |
| 07                  | X                   | X |    |    |  |  |  |  |  |  |  |  |  |
| 08                  | X                   | X |    |    |  |  |  |  |  |  |  |  |  |
| 09                  | X                   | X |    |    |  |  |  |  |  |  |  |  |  |
| 10                  | X                   | X |    |    |  |  |  |  |  |  |  |  |  |
| 11                  | X                   | X |    | X  |  |  |  |  |  |  |  |  |  |

**ICT-6D**

|    |   |   |   |   |  |  |  |  |  |  |  |  |  |
|----|---|---|---|---|--|--|--|--|--|--|--|--|--|
| 12 | X | X |   |   |  |  |  |  |  |  |  |  |  |
| 13 | X | X |   |   |  |  |  |  |  |  |  |  |  |
| 14 | X | X |   |   |  |  |  |  |  |  |  |  |  |
| 15 | X | X |   |   |  |  |  |  |  |  |  |  |  |
| 16 | X | X | X |   |  |  |  |  |  |  |  |  |  |
| 17 | X | X | X |   |  |  |  |  |  |  |  |  |  |
| 18 | X | X |   |   |  |  |  |  |  |  |  |  |  |
| 19 | X | X |   |   |  |  |  |  |  |  |  |  |  |
| 20 |   | X | X |   |  |  |  |  |  |  |  |  |  |
| 21 | X | X |   |   |  |  |  |  |  |  |  |  |  |
| 22 | X | X |   |   |  |  |  |  |  |  |  |  |  |
| 23 | X | X |   | X |  |  |  |  |  |  |  |  |  |
| 24 |   | X |   |   |  |  |  |  |  |  |  |  |  |
| 25 | X | X |   | X |  |  |  |  |  |  |  |  |  |
| 26 | X | X |   |   |  |  |  |  |  |  |  |  |  |
| 27 | X | X |   |   |  |  |  |  |  |  |  |  |  |
| 28 | X | X |   |   |  |  |  |  |  |  |  |  |  |
| 29 | X | X |   |   |  |  |  |  |  |  |  |  |  |
| 30 | X | X |   |   |  |  |  |  |  |  |  |  |  |
| 31 |   | X |   |   |  |  |  |  |  |  |  |  |  |
| 32 | X | X |   |   |  |  |  |  |  |  |  |  |  |
| 33 | X | X |   |   |  |  |  |  |  |  |  |  |  |
| 35 | X | X |   |   |  |  |  |  |  |  |  |  |  |
| 38 | X | X |   |   |  |  |  |  |  |  |  |  |  |
| 40 |   | X | X |   |  |  |  |  |  |  |  |  |  |
| 41 | X | X |   |   |  |  |  |  |  |  |  |  |  |
| 42 |   | X |   |   |  |  |  |  |  |  |  |  |  |
| 43 |   | X |   |   |  |  |  |  |  |  |  |  |  |
| 44 | X | X |   |   |  |  |  |  |  |  |  |  |  |

**ICT-6D**

|     |   |   |   |   |      |  |  |  |  |  |  |  |  |
|-----|---|---|---|---|------|--|--|--|--|--|--|--|--|
| 48  | X | X |   | X |      |  |  |  |  |  |  |  |  |
| 49  | X | X |   |   |      |  |  |  |  |  |  |  |  |
| 50  | X | X |   |   |      |  |  |  |  |  |  |  |  |
| 51  |   | X |   |   |      |  |  |  |  |  |  |  |  |
| 52  |   | X |   |   |      |  |  |  |  |  |  |  |  |
| 53  |   | X |   |   |      |  |  |  |  |  |  |  |  |
| 54  |   | X |   |   |      |  |  |  |  |  |  |  |  |
| 55  |   | X |   |   |      |  |  |  |  |  |  |  |  |
| 56  |   | X |   |   |      |  |  |  |  |  |  |  |  |
| 60  |   | X |   |   |      |  |  |  |  |  |  |  |  |
| 63  |   | X |   |   |      |  |  |  |  |  |  |  |  |
| 66  | X | X | X |   |      |  |  |  |  |  |  |  |  |
| 67  |   | X |   |   |      |  |  |  |  |  |  |  |  |
| 68  |   | X |   |   |      |  |  |  |  |  |  |  |  |
| 69  |   | X |   | X |      |  |  |  |  |  |  |  |  |
| 70  |   | X |   |   |      |  |  |  |  |  |  |  |  |
| 71  |   | X |   |   |      |  |  |  |  |  |  |  |  |
| 72  |   | X |   |   |      |  |  |  |  |  |  |  |  |
| 73  |   | X |   |   |      |  |  |  |  |  |  |  |  |
| 75  |   | X |   |   |      |  |  |  |  |  |  |  |  |
| 76  | X | X |   |   |      |  |  |  |  |  |  |  |  |
| 77  | X | X |   |   |      |  |  |  |  |  |  |  |  |
| 78  | X | X | X |   |      |  |  |  |  |  |  |  |  |
| H78 |   |   |   |   | 9078 |  |  |  |  |  |  |  |  |
| 81  | X | X |   |   |      |  |  |  |  |  |  |  |  |
| 82  | X | X |   |   |      |  |  |  |  |  |  |  |  |
| 85  | X | X |   |   |      |  |  |  |  |  |  |  |  |
| 86  | X | X |   |   |      |  |  |  |  |  |  |  |  |
| 93  | X | X |   |   |      |  |  |  |  |  |  |  |  |

**ICT-6D**

| 94                  | X                  | X |    |    |  |  |  |  |  |  |  |  |  |
|---------------------|--------------------|---|----|----|--|--|--|--|--|--|--|--|--|
| 95                  | X                  | X |    |    |  |  |  |  |  |  |  |  |  |
| 96                  | X                  | X |    |    |  |  |  |  |  |  |  |  |  |
| 97                  | X                  | X |    |    |  |  |  |  |  |  |  |  |  |
| 99                  | X                  | X |    |    |  |  |  |  |  |  |  |  |  |
| 100                 | X                  | X |    |    |  |  |  |  |  |  |  |  |  |
| 101                 | X                  | X |    |    |  |  |  |  |  |  |  |  |  |
| 102                 |                    | X |    |    |  |  |  |  |  |  |  |  |  |
| 103                 |                    | X |    |    |  |  |  |  |  |  |  |  |  |
| 104                 | X                  | X |    |    |  |  |  |  |  |  |  |  |  |
| 106                 | X                  | X |    |    |  |  |  |  |  |  |  |  |  |
| 109                 | X                  | X |    |    |  |  |  |  |  |  |  |  |  |
| 110                 |                    | X |    |    |  |  |  |  |  |  |  |  |  |
| 147                 | X                  | X |    |    |  |  |  |  |  |  |  |  |  |
| 160                 | X                  | X |    |    |  |  |  |  |  |  |  |  |  |
| 161                 | X                  | X |    |    |  |  |  |  |  |  |  |  |  |
| 162                 | X                  | X |    |    |  |  |  |  |  |  |  |  |  |
| 163                 | X                  | X |    |    |  |  |  |  |  |  |  |  |  |
| 174                 | X                  | X |    |    |  |  |  |  |  |  |  |  |  |
| 175                 |                    | X |    |    |  |  |  |  |  |  |  |  |  |
| 181                 | X                  | X |    |    |  |  |  |  |  |  |  |  |  |
| 182                 | X                  | X |    |    |  |  |  |  |  |  |  |  |  |
| 192                 | X                  |   |    |    |  |  |  |  |  |  |  |  |  |
| 193                 | X                  |   |    |    |  |  |  |  |  |  |  |  |  |
| 194                 | X                  | X |    |    |  |  |  |  |  |  |  |  |  |
| 257                 | X                  | X |    |    |  |  |  |  |  |  |  |  |  |
| SERIES<br>45<br>NO. | CIRCUIT DESCRPTION |   |    |    |  |  |  |  |  |  |  |  |  |
|                     | A                  | B | HC | UB |  |  |  |  |  |  |  |  |  |
| 01                  | X                  | X |    |    |  |  |  |  |  |  |  |  |  |
| 02                  | X                  | X |    |    |  |  |  |  |  |  |  |  |  |
| 03                  | X                  | X |    |    |  |  |  |  |  |  |  |  |  |
| 04                  |                    | X |    |    |  |  |  |  |  |  |  |  |  |



**ICT-6D**

|    |   |   |   |  |  |  |  |  |  |  |  |  |  |
|----|---|---|---|--|--|--|--|--|--|--|--|--|--|
| 06 |   | X |   |  |  |  |  |  |  |  |  |  |  |
| 08 |   | X |   |  |  |  |  |  |  |  |  |  |  |
| 10 | X | X |   |  |  |  |  |  |  |  |  |  |  |
| 11 | X | X | X |  |  |  |  |  |  |  |  |  |  |
| 12 | X | X |   |  |  |  |  |  |  |  |  |  |  |
| 13 |   | X |   |  |  |  |  |  |  |  |  |  |  |
| 14 | X | X |   |  |  |  |  |  |  |  |  |  |  |
| 15 | X | X |   |  |  |  |  |  |  |  |  |  |  |
| 16 | X | X |   |  |  |  |  |  |  |  |  |  |  |
| 17 |   | X |   |  |  |  |  |  |  |  |  |  |  |
| 18 | X | X |   |  |  |  |  |  |  |  |  |  |  |
| 19 | X | X |   |  |  |  |  |  |  |  |  |  |  |
| 20 | X | X | X |  |  |  |  |  |  |  |  |  |  |
| 22 | X | X |   |  |  |  |  |  |  |  |  |  |  |
| 26 | X | X |   |  |  |  |  |  |  |  |  |  |  |
| 27 |   | X |   |  |  |  |  |  |  |  |  |  |  |
| 29 | X | X |   |  |  |  |  |  |  |  |  |  |  |
| 32 | X | X |   |  |  |  |  |  |  |  |  |  |  |
| 39 | X | X | X |  |  |  |  |  |  |  |  |  |  |
| 43 | X | X |   |  |  |  |  |  |  |  |  |  |  |
| 51 |   | X |   |  |  |  |  |  |  |  |  |  |  |
| 55 | X | X |   |  |  |  |  |  |  |  |  |  |  |
| 53 |   | X |   |  |  |  |  |  |  |  |  |  |  |
| 56 | X | X |   |  |  |  |  |  |  |  |  |  |  |
| 60 | X | X |   |  |  |  |  |  |  |  |  |  |  |
| 61 | X | X |   |  |  |  |  |  |  |  |  |  |  |
| 66 |   | X |   |  |  |  |  |  |  |  |  |  |  |
| 72 | X | X |   |  |  |  |  |  |  |  |  |  |  |
| 81 |   | X |   |  |  |  |  |  |  |  |  |  |  |
| 84 | X | X |   |  |  |  |  |  |  |  |  |  |  |
| 85 | X | X |   |  |  |  |  |  |  |  |  |  |  |

| SERIES<br>140<br>NO. | CIRCUIT DESCRITPION |   |    |    |  |  |  |  |  |  |  |  |  |
|----------------------|---------------------|---|----|----|--|--|--|--|--|--|--|--|--|
|                      | A                   | B | HC | UB |  |  |  |  |  |  |  |  |  |
| 00                   | X                   | X |    | X  |  |  |  |  |  |  |  |  |  |
| 01                   |                     | X |    | X  |  |  |  |  |  |  |  |  |  |
| 02                   | X                   | X | X  | X  |  |  |  |  |  |  |  |  |  |
| 06                   | X                   | X |    |    |  |  |  |  |  |  |  |  |  |
| 07                   | X                   | X |    |    |  |  |  |  |  |  |  |  |  |
| 08                   | X                   | X |    |    |  |  |  |  |  |  |  |  |  |
| 09                   | X                   | X |    |    |  |  |  |  |  |  |  |  |  |
| 10                   | X                   | X |    |    |  |  |  |  |  |  |  |  |  |
| 11                   | X                   | X |    | X  |  |  |  |  |  |  |  |  |  |
| 12                   | X                   | X |    | X  |  |  |  |  |  |  |  |  |  |
| 13                   | X                   | X |    |    |  |  |  |  |  |  |  |  |  |
| 14                   | X                   | X |    |    |  |  |  |  |  |  |  |  |  |
| 15                   | X                   | X |    |    |  |  |  |  |  |  |  |  |  |
| 16                   | X                   | X | X  |    |  |  |  |  |  |  |  |  |  |
| 17                   | X                   | X | X  |    |  |  |  |  |  |  |  |  |  |
| 18                   |                     | X |    |    |  |  |  |  |  |  |  |  |  |
| 19                   | X                   | X |    |    |  |  |  |  |  |  |  |  |  |
| 20                   | X                   | X | X  |    |  |  |  |  |  |  |  |  |  |
| 21                   | X                   | X |    |    |  |  |  |  |  |  |  |  |  |
| 22                   | X                   | X |    |    |  |  |  |  |  |  |  |  |  |
| 23                   | X                   | X |    | X  |  |  |  |  |  |  |  |  |  |
| 24                   | X                   | X | X  |    |  |  |  |  |  |  |  |  |  |
| 25                   | X                   | X |    | X  |  |  |  |  |  |  |  |  |  |
| 26                   | X                   | X |    |    |  |  |  |  |  |  |  |  |  |
| 27                   | X                   | X |    |    |  |  |  |  |  |  |  |  |  |
| 28                   | X                   | X |    |    |  |  |  |  |  |  |  |  |  |

**ICT-6D**

| SERIES<br>140<br>NO. | CIRCUIT DESCRPTION |   |    |    |      |  |  |  |  |  |  |  |  |
|----------------------|--------------------|---|----|----|------|--|--|--|--|--|--|--|--|
|                      | A                  | B | HC | UB |      |  |  |  |  |  |  |  |  |
| 29                   | X                  | X |    |    |      |  |  |  |  |  |  |  |  |
| 30                   | X                  | X |    |    |      |  |  |  |  |  |  |  |  |
| 31                   |                    | X |    |    |      |  |  |  |  |  |  |  |  |
| 32                   | X                  | X |    |    |      |  |  |  |  |  |  |  |  |
| 33                   | X                  | X |    |    |      |  |  |  |  |  |  |  |  |
| 35                   | X                  | X |    |    |      |  |  |  |  |  |  |  |  |
| 38                   | X                  | X |    |    |      |  |  |  |  |  |  |  |  |
| 40                   | X                  | X |    |    |      |  |  |  |  |  |  |  |  |
| 41                   | X                  | X |    |    |      |  |  |  |  |  |  |  |  |
| 42                   | X                  | X |    |    |      |  |  |  |  |  |  |  |  |
| 43                   | X                  | X |    |    |      |  |  |  |  |  |  |  |  |
| 44                   | X                  | X |    |    |      |  |  |  |  |  |  |  |  |
| 48                   | X                  | X |    |    |      |  |  |  |  |  |  |  |  |
| 49                   |                    | X |    | X  |      |  |  |  |  |  |  |  |  |
| 50                   |                    | X |    |    |      |  |  |  |  |  |  |  |  |
| 51                   |                    | X |    |    |      |  |  |  |  |  |  |  |  |
| 52                   |                    | X | X  |    |      |  |  |  |  |  |  |  |  |
| 53                   |                    |   |    |    |      |  |  |  |  |  |  |  |  |
| 54                   |                    | X |    |    |      |  |  |  |  |  |  |  |  |
| 55                   |                    | X |    |    |      |  |  |  |  |  |  |  |  |
| 56                   |                    | X |    |    |      |  |  |  |  |  |  |  |  |
| 60                   |                    | X |    |    |      |  |  |  |  |  |  |  |  |
| 63                   |                    | X |    |    |      |  |  |  |  |  |  |  |  |
| 66                   | X                  | X | X  |    |      |  |  |  |  |  |  |  |  |
| 67                   |                    | X |    |    |      |  |  |  |  |  |  |  |  |
| 68                   |                    | X |    |    |      |  |  |  |  |  |  |  |  |
| 69                   |                    | X |    |    |      |  |  |  |  |  |  |  |  |
| 70                   |                    | X |    |    |      |  |  |  |  |  |  |  |  |
| 71                   |                    | X |    |    |      |  |  |  |  |  |  |  |  |
| 72                   |                    | X |    |    |      |  |  |  |  |  |  |  |  |
| 73                   |                    | X |    |    |      |  |  |  |  |  |  |  |  |
| 75                   |                    | X | X  |    |      |  |  |  |  |  |  |  |  |
| 76                   |                    | X |    |    |      |  |  |  |  |  |  |  |  |
| 77                   |                    | X |    |    |      |  |  |  |  |  |  |  |  |
| 78                   |                    | X | X  |    |      |  |  |  |  |  |  |  |  |
| H78                  |                    |   |    |    | 9078 |  |  |  |  |  |  |  |  |
| 81                   |                    | X |    |    |      |  |  |  |  |  |  |  |  |
| 82                   |                    | X |    |    |      |  |  |  |  |  |  |  |  |
| 85                   | X                  | X |    |    |      |  |  |  |  |  |  |  |  |
| 86                   | X                  | X |    |    |      |  |  |  |  |  |  |  |  |
| 93                   |                    | X |    |    |      |  |  |  |  |  |  |  |  |
| 94                   |                    | X |    |    |      |  |  |  |  |  |  |  |  |
| 95                   | X                  | X |    |    |      |  |  |  |  |  |  |  |  |
| 96                   | X                  | X |    |    |      |  |  |  |  |  |  |  |  |
| 97                   | X                  | X |    |    |      |  |  |  |  |  |  |  |  |
| 99                   |                    | X |    |    |      |  |  |  |  |  |  |  |  |
| 100                  | X                  | X |    |    |      |  |  |  |  |  |  |  |  |
| 101                  | X                  | X |    |    |      |  |  |  |  |  |  |  |  |
| 102                  |                    | X |    |    |      |  |  |  |  |  |  |  |  |
| 103                  |                    | X |    |    |      |  |  |  |  |  |  |  |  |
| 104                  | X                  | X |    |    |      |  |  |  |  |  |  |  |  |
| 106                  | X                  | X |    |    |      |  |  |  |  |  |  |  |  |
| 109                  | X                  | X |    |    |      |  |  |  |  |  |  |  |  |
| 110                  |                    | X |    |    |      |  |  |  |  |  |  |  |  |
| 147                  | X                  | X |    |    |      |  |  |  |  |  |  |  |  |
| 160                  |                    | X |    |    |      |  |  |  |  |  |  |  |  |
| 161                  |                    | X |    |    |      |  |  |  |  |  |  |  |  |
| 162                  |                    | X |    |    |      |  |  |  |  |  |  |  |  |
| 163                  |                    | X |    |    |      |  |  |  |  |  |  |  |  |
| 175                  |                    | X |    |    |      |  |  |  |  |  |  |  |  |

## ICT-6D

---

| SERIES<br>140<br>NO. | CIRCUIT DESCRITPION |   |    |    |  |  |  |  |  |  |  |  |  |
|----------------------|---------------------|---|----|----|--|--|--|--|--|--|--|--|--|
|                      | A                   | B | HC | UB |  |  |  |  |  |  |  |  |  |
| 181                  | X                   | X |    |    |  |  |  |  |  |  |  |  |  |
| 182                  | X                   | X |    |    |  |  |  |  |  |  |  |  |  |
| 192                  | X                   |   |    |    |  |  |  |  |  |  |  |  |  |
| 93                   | X                   |   |    |    |  |  |  |  |  |  |  |  |  |
| 194                  |                     | X |    |    |  |  |  |  |  |  |  |  |  |
| 257                  | X                   | X |    |    |  |  |  |  |  |  |  |  |  |

\* Manually select IC number but not automatically.

### Driver

ULN2001 ULN2003 ULN2004 ULN2005 ULN2803 ULN2804

