

GPS-3303DPX

Programmable DC Power Supply



GENERAL POLYTRONIC SYSTEMS LTD.
14 REGENTS STREET, LONDON NW10 5LG, UK
TEL: 0044 (0) 20 8960 96 88 FAX: 0044 (0) 20 8964 36 00
E-mail: sales@gpslimited.com

GPS-3303DPX

Product Overview

GPS-3303DPX Linear Programmable DC Power Supply has a 4.3 inches TFT_LCD display, Supports Programmability and Real Time Wave Display, bringing a new experience to users. It has three isolated outputs: two adjustable channels and one selectable channel from 2.5v, 3.3V, and 5V. It also has output short and overload protect function, and can be used in production and development.

Main Features

- ✦ 3 independent controlled and isolated output, 32V/3.2A×2, 2.5V/3.3V/5V/3.2A×1, total 220W
- ✦ 4 digits Voltage, 3 digits Current Display, Minimum Resolution: 10mV/10mA
- ✦ Supports panel timing output functions
- ✦ 4.3 inch true color TFT- LCD 480x272 display
- ✦ 3 types of output modes: independent, series, parallel
- ✦ 100V/120V/220V/230V compatible design to meet the needs of different power grids.
- ✦ Intelligent temperature-controlled fan , effectively reducing noise
- ✦ Clear graphical interface, with the waveform display function
- ✦ Internal 5 groups of system parameter save/recall, supports data storage space expansion
- ✦ Provides PC software: Easypower , supports SCPI , LabView driver





Characteristics

High-resolution and high-precision output

The highest resolution of 10mV/10mA, provides excellent setting and read back accuracy. This ensures accurate output even with very small changes in voltage or current. This is impossible for a low resolution power supply.

Series/parallel/independent mode function

Series and parallel function allows two channels combined into one output with more power output capability, extending the application range. Each of 3 channels power can be turned on or off independently and also can be turned all on or all off.

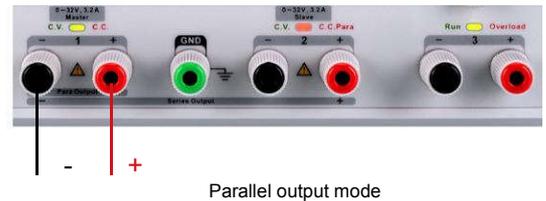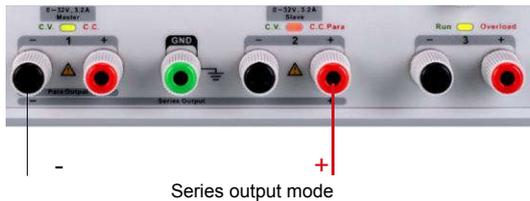


Panel displays the timing output

Through front panel operation, 5 groups of timing settings and output control can be displayed, which provides users a simple power programming function. Also a connection can be made with GPS Ltd.'s EasyPower PC software providing a full range of communication and control requirements.




Panel timing output

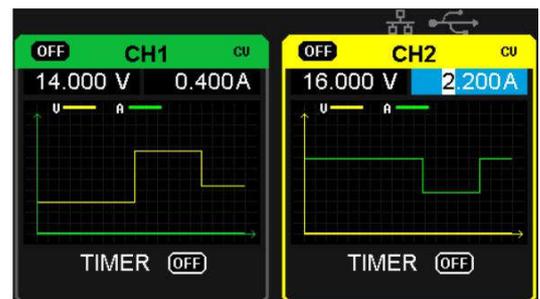

Real time wave display

Save/Recall setting parameters

GPS-3303DPX programmable power supply can save or recall 5 groups of setting parameter in internal storage, also supports external storage expansion. You can easily obtain the settings you needed.

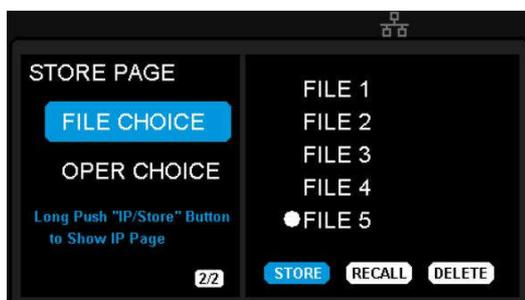

Internal Storage



PC Timer

Specification

Model	GPS-3303DPX	
Channel	CH1 output voltage: 0 ~ 32V, output current: 0 ~ 3.2A CH2 output voltage: 0 ~ 32V, output current: 0 ~ 3.2A CH3 output voltage: 2.5/3.3/5.0V, output current : 3.2A	
Display	4.3 inch true color TFT-LCD 4 digits voltage 3 digits current	
Resolution	10mV/10mA	
Program Accuracy	Voltage \pm (0.5% of reading+2digits) Current \pm (0.5% of reading+2digits)	
Readback Accuracy	Voltage \pm (0.5% of reading+2digits) Current \pm (0.5% of reading+2digits)	
Constant Voltage Mode	Line Regulation	$\leq 0.01\%+3\text{mV}$
	Load Regulation	$\leq 0.01\%+3\text{mV}$
	Ripple&Noise	$\leq 1\text{mVrms}$ (5Hz ~ 1MHz)
	Recovery Time	$< 50\mu\text{s}$ (50% load change, minimum load 0.5A)
Constant Current Mode	Line Regulation	$\leq 0.2\%+3\text{mA}$
	Load Regulation	$\leq 0.2\%+3\text{mA}$
	Ripple&Noise	$\leq 3\text{mArms}$
Parallel Mode	Line Regulation	$\leq 0.01\%+3\text{mV}$
	Load Regulation	$\leq 0.01\%+3\text{mV}$
Series Mode	Line Regulation	$\leq 0.01\%+5\text{mV}$
	Load Regulation	$\leq 300\text{mV}$
CH3	Output Voltage	(2.5/3.3/5V) $\pm 8\%$
	Line Regulation	$\leq 0.01\%+3\text{mV}$
	Load Regulation	$\leq 0.01\%+3\text{mV}$
	Ripple&Noise	$\leq 1\text{mVrms}$ (5Hz ~ 1MHz)
Locking Key	Yes	
Memory Save/Recall	5 Sets	
Max Output Power	220W	
Power Source	AC 100V/120V/220V/230V $\pm 10\%$ 50/60Hz	
Standard Configuration Interface	USB Device、LAN	
Insulation	Case to Terminal $\geq 20\text{M}\Omega$ (DC 500V) Case to AC line $\geq 30\text{M}\Omega$ (DC 500V)	
Operating Environment	Outdoor Usage: Elevation: $\leq 2000\text{m}$ Environment Temperature 0~40℃ Relative Humidity $\leq 80\%$ Installation Level: II Pollution Level: 2	
Storage Environment	Environment Temperature: -10~70℃ Relative Humidity $\leq 70\%$	
Dimension	225(W) \times 143(H) \times 278(D) mm	
Weight	$\approx 8.0\text{kg}$	

Ordering information

Product description	Product No
3 channels independent output, min resolution 10mV/10mA, USB Device & LAN, 4.3 inch LCD display	GPS-3303DPX

Standard Accessories
USB Cable -1
Quick Start -1
Product Certificate -1
Power cord -1
Resources CD(product document and software)-1
Output Test Cord -2 Sets