


DAL-20 series

High voltage detector, made in Japan

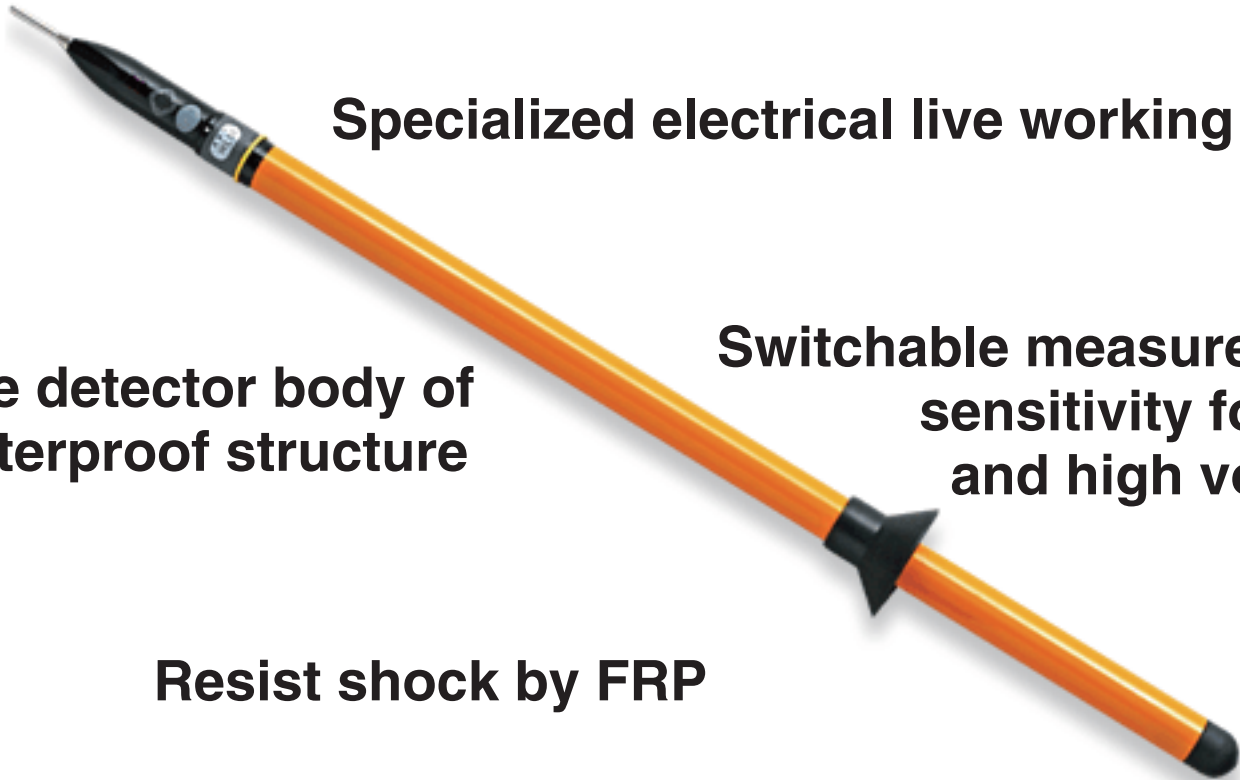

Specialized electrical live working usage

The detector body of waterproof structure

Switchable measurement sensitivity for low and high voltage

Resist shock by FRP

Developed by

Central power grid in Japan

Product ID	DAL-20-8	DAL-20 · 30-12
Use voltage range	AC80V~23kV	AC80V~35kV
Initiation of movement voltage (Bare wire/voltage to ground)	Low voltage: AC80V High voltage: AC1500V	
Frequency	50/60Hz	
Indication	Continuity beeping and flashing	
Flashing	confirmable by 8000lx illuminance	
Beeping	More than 50dB away from 2m	
Withstand voltage	Dry condition : 46kV/1min After water absorption : 23kV/1min	Dry condition : 70kV/1min After water absorption : 35kV/1min
Operating Temperature	-10~40°C	
Power Supply	AAA battery (R03 1.5V) *2	
Dimension	φ28×800mm	φ33×1200mm
Weight	Approx.260g	Approx.360g

MULTI
Established. 1986, Tokyo
Measuring Instruments